


D100 Low Volume Heated Dispenser

Heated Dispenser Dimensions

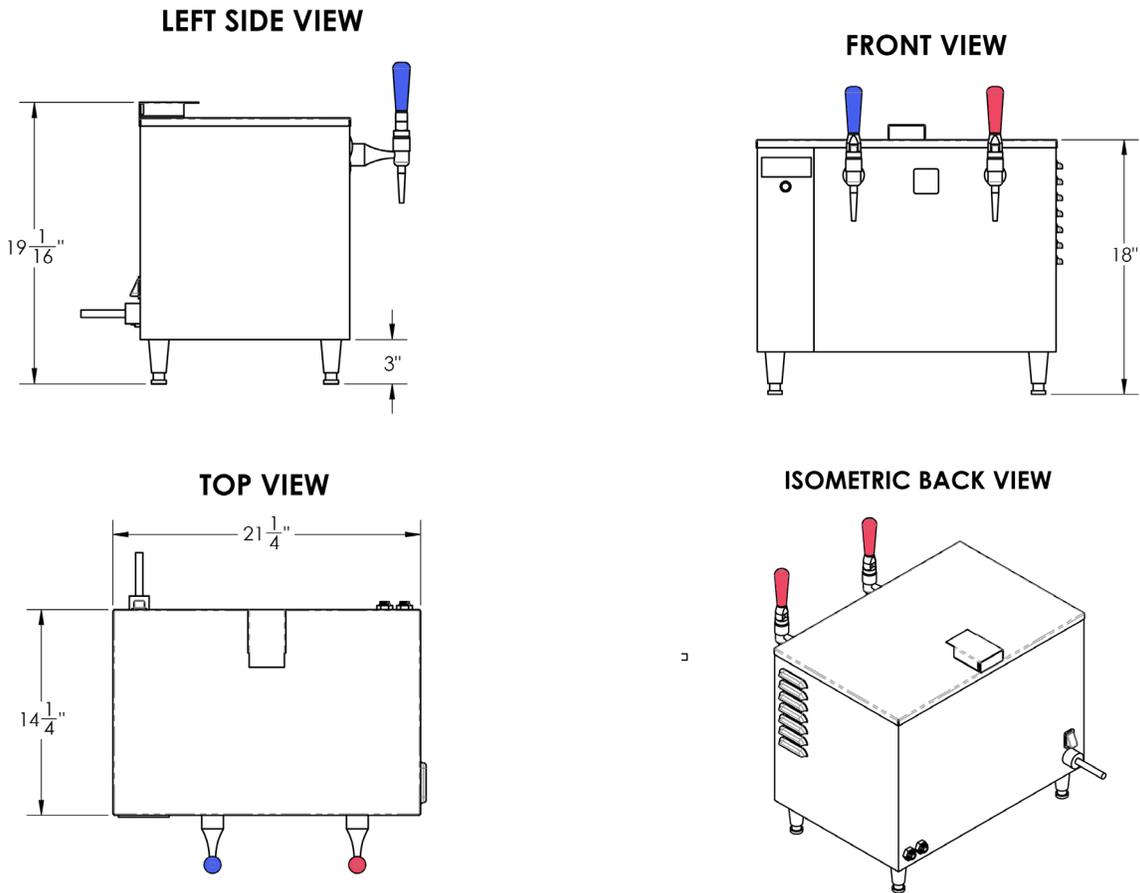

D100 Dispenser Specifications

Dispensing Speed	48 ounces per minute - 3 -16 ounce cups.
Dispensing Temperature (hot)	Factory set at 175 degrees (F) - can be changed by customer
Product Types	Cold brew and nitro Coffee, Tea, mulled wine, Chocolate Milk, broth, etc.
Watts	1800 watts
Voltage	110 VAC
Amperage Draw	16.65 Amps
Hz	60 Hz, single Phase
Gas pressure	36 psi - stout faucet w/ screen; 25 psi standard faucet or stout faucet w/o screen
Product Packaging Type	Kegs, soda tanks, BiB's, other bulk packaging

Dispensing Unit Notes

- D100 is available in the following faucet configurations: 1 hot, 2 hot , 1 hot/1 cold, & 2 hot/2 cold
- D100 can be installed with or without the legs. Health regulations may require additional trim if no legs used
- Utilizes Nitro, CO2 or compressed air - depending on product and bulk packaging used